


MAIN FUNCTION BUTTON:

Robic M-457

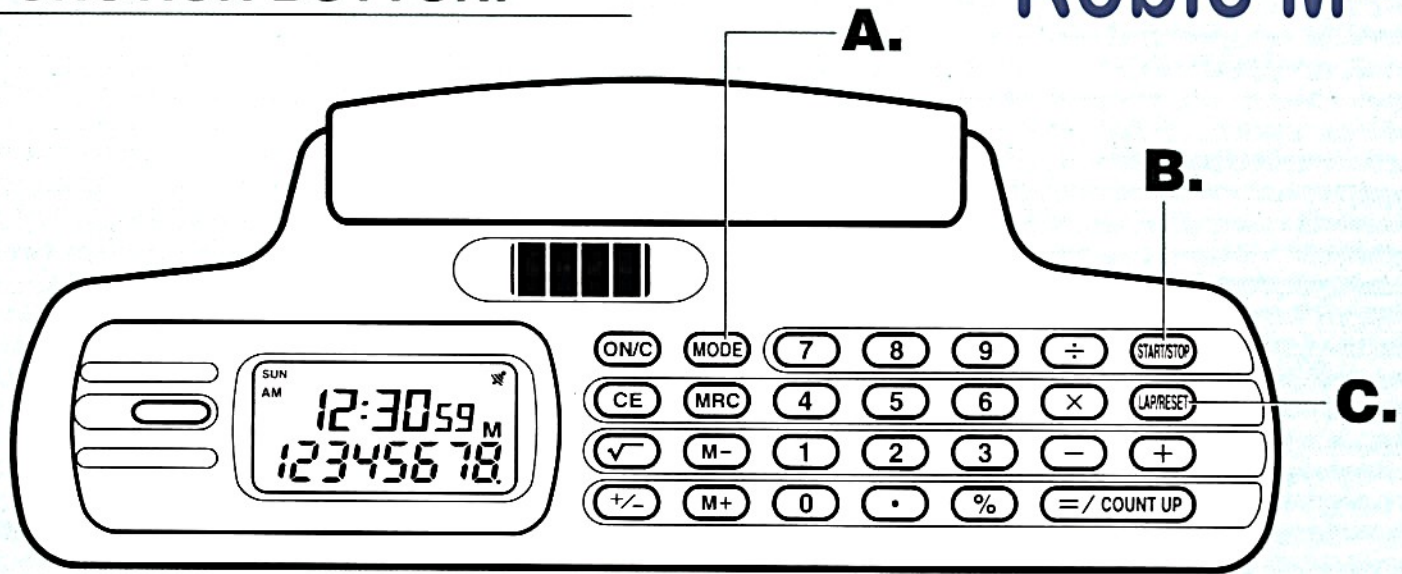

STOPWATCH INSTRUCTIONS:

Your stopwatch features • 24 hour stopwatch • Time of day and calculator • Alarm clock • 12/24 hour option

FULL FUNCTION CALCULATOR INSTRUCTIONS:

For easy calculating press the **ON/C** button to turn ON the calculator. a "O" will appear.

Follow the table below to see how the calculator works

The Stopwatch Operation

Press A until you get to the Stopwatch Display
If necessary, Press B - Stop & C - Reset to O

START-STOP TIMING	SPLIT TIMING	1 - 2 Fast Finish
B - Start	B - Start	B - Start
B - Stop (Repeatedly)	C - Split	C - Stop #1
Press B for time-in/time-out timing)	C - Release (Repeatedly)	B - Stop #2
C - Reset	Press C,C for more split times)	C - Release
	B - Stop	(See,record #2 time
	C,C - Reset	C - Reset

PROBLEM	DEPRESS KEY	DISPLAY
$(5 \times 6 - 34) \div 2 + 8.27 = 6.27$	ON/C 5 × 6 = 34 ÷ 2 + 8.27 =	6.27
a. (1) $5 \times 6 = 30$ (2) $5 \times 4.5 = 22.5$ b. (1) $6 \div 5 = 1.2$ (2) $4 \div 5 = 0.8$	ON/C 5 × 6 = 4.5 = ON/C 6 ÷ 5 = 4 =	30. 22.5 1.2 0.8
$3^3 \times 2 \div 5^3 = 0.432$	ON/C 3 × = = × 2 ÷ 5 = =	0.432
$\frac{1}{\sqrt{2} \times \sqrt{8} \times \sqrt{3}} = 0.1443375$	ON/C 2 × 8 × 3 = √ ÷ =	0.1443375
a. $360 \times 85\% = 306$ b. $360 \times (1 + 2\%) = 367.2$ c. $360 \times (1 - 15\%) = 306$	ON/C 360 × 85 % ON/C 360 + 2 % ON/C 360 - 15 %	306. 367.2 306.
$120 \times 24 = 2880$ $-) 21 \times 40 = 840$ $+) 5 \times 25 = 125$ = 2165	MRC MRC ON/C 120 × 24 M+ 21 × 40 M- 5 × 25 M+ MRC	M 2880. M 840. M 125. M 2165.

TIME, CALCULATOR & ALARM DISPLAY

Press A until you get to the Time Display
Hold B - display Month, Date, & Day
Hold C - see Alarm Time
Hold C & Press B - Alarm On/Off

TO SET TIME & CALENDAR

Press A 3 times to enter Set Mode
Hold C to select Seconds, Minutes, Hour
(A/P=12 hour, H=24 hour), Date, Month, Day
Press B to change any of the above.
(Seconds only resets to 00
Hold B to return to Time display

TO SET/DISARM HOURLY CHIME/ALARM

Press A until you get to the Time Display
Hold C - see Alarm Time &
Press A - Chime is ON when dashes appear above display. Chime is OFF when no dashes appear

TO SET ALARM

Press A - 2 times to enter Set Mode
Press C - to select Minutes & Hours
Press B - to select Minutes & Hours
Press A - to return to Time display

NOTE

- The calculator will automatically turn OFF if not used for 9 minutes.
- To correct wrong key entry during calculation, press **CE** button once and continue with new key entry.
- Press **MRC** key twice, or **ON/C** once, to clear Memory contents.
- Power Source: Built-in Solar Cell battery.
- The " = / CONUNT UP" key is for the calculator only. It does not perform any stopwatch function.
- The " = / COUNT UP" key performs an addition function when the calculator is turned on.